



# HEAVY DUTY SLUGGING / STRIKING WRENCHES

## OFFSET HANDLE RING TYPE SLUGGING WRENCH

Offset Handle designed close to head to provide clearance in confined areas. A complete range of Offset striking wrenches up to 130 mm provides the most extensive line on the market.



Wrench Size (A/F)						
METRIC SIZE		SAE SIZE		Head Dia.	Head Thk.	Length (mm)
Part No.	Size	Part No.	Size			
TOM- 19	19	TOS-25	3/4"	56	22	250
TOM- 22	22	TOS-28	7/8"	56	22	250
TOM- 24	24	TOS-29	15/16"	56	24	265
TOM- 27	27	TOS-31	1.1/16"	56	24	265
TOM- 30	30	TOS-33	1.3/16"	56	24	265
TOM- 32	32	TOS-34	1.1/4"	58	25	270
TOM- 33	33	TOS-35	1.5/16"	59	25	270
TOM- 35	35	TOS-36	1.3/8"	62	32	310
TOM- 36	36	TOS-37	1.7/16"	64	28	290
TOM- 38	38	TOS-38	1.1/2"	66	28	290
TOM- 41	41	TOS-39	1.5/8"	68	28	290
TOM- 43	43	TOS-40	1.1/16"	68	28	290
TOM- 44	44	TOS-41	1.3/4"	68	28	290
TOM- 46	46	TOS-42	1.13/16"	76	32	340
TOM- 47	47	TOS-43	1.7/8"	76	35	340
TOM- 50	50	TOS-45	2"	82	36	340
TOM- 52	52	TOS-46	2.1/16"	85	38	360
TOM- 55	55	TOS-47	2.3/16"	90	38	360
TOM- 57	57	TOS-48	2.1/4"	90	38	360
TOM- 60	60	TOS-50	2.3/8"	96	41	380
TOM- 62	62	TOS-51	2.7/16"	100	44	380
TOM- 63	63	TOS-52	2.1/2"	102	44	380
TOM- 65	65	TOS-53	2.9/16"	105	45	380
TOM- 67	67	TOS-54	2.5/8"	108	44	380
TOM- 70	70	TOS-56	2.3/4"	112	48	400
TOM- 71	71	TOS-57	2.13/16"	112	50	400
TOM- 75	75	TOS-59	2.15/16"	120	55	400
TOM- 76	76	TOS-60	3"	122	50	400
TOM- 80	80	TOS-61	3.1/8"	126	60	435
TOM- 85	85	TOS-63	3.3/8"	132	60	435
TOM- 90	90	TOS-64	3.5/8"	142	50	440
TOM- 95	95	TOS-65	3.3/4"	150	60	465
TOM- 98	98	TOS-66	3.7/8"	158	60	465
TOM- 100	100	TOS-67	4"	164	60	465
TOM- 105	105	TOS-68	4.1/8"	172	65	540
TOM- 110	110	TOS-69	4.1/4"	180	65	540
TOM- 115	115	TOS-70	4.1/2"	186	65	540
TOM- 120	120	TOS-72	4.3/4"	194	70	540
TOM- 125	125	TOS-73	4.7/8"	200	70	540
TOM- 130	130	TOS-74	5"	205	70	540

## OPEN JAW TYPE SLUGGING WRENCH

Extra Heavy Duty Precision forged and fully Heat Treated for a life time of Dependable performance 15° angled Head Permits complete nut rotation in a 30° arc Rust Resistant black finish provides super finish and resistance to corrosion in industrial use.



Wrench Size (A/F)						
METRIC SIZE		SAE SIZE		Head Dia.	Head Thk.	Length (mm)
Part No.	Size	Part No.	Size			
TDM- 19	19	TDS-25	3/4"	54	18	190
TDM- 22	22	TDS-28	7/8"	54	18	190
TDM- 24	24	TDS-29	15/16"	54	18	190
TDM- 27	27	TDS-31	1.1/16"	54	18	190
TDM- 29	29	TDS-32	1.1/8"	54	18	190
TDM- 30	30	TDS-33	1.3/16"	54	18	190
TDM- 32	32	TDS-34	1.1/4"	80	18	210
TDM- 33	33	TDS-35	1.5/16"	80	18	210
TDM- 35	35	TDS-36	1.3/8"	80	18	210
TDM- 36	36	TDS-37	1.7/16"	80	18	210
TDM- 38	38	TDS-38	1.1/2"	80	18	210
TDM- 41	41	TDS-39	1.5/8"	110	22	275
TDM- 43	43	TDS-40	1.11/16"	110	22	275
TDM- 44	44	TDS-41	1.3/4"	110	22	275
TDM- 46	46	TDS-42	1.13/16"	110	22	275
TDM- 47	47	TDS-43	1.7/8"	110	22	275
TDM- 50	50	TDS-45	2"	110	22	275
TDM- 52	52	TDS-46	2.1/16"	135	25	325
TDM- 55	55	TDS-47	2.3/16"	135	25	325
TDM- 57	57	TDS-48	2.1/4"	135	25	325
TDM- 60	60	TDS-50	2.3/8"	135	25	325
TDM- 62	62	TDS-51	2.7/16"	150	32	362
TDM- 63	63	TDS-52	2.1/2"	150	32	362
TDM- 65	65	TDS-53	2.9/16"	150	32	362
TDM- 67	67	TDS-54	2.5/8"	150	32	362
TDM- 70	70	TDS-56	2.3/4"	150	32	362
TDM- 71	71	TDS-57	2.13/16"	172	36	405
TDM- 75	75	TDS-59	2.15/16"	172	36	405
TDM- 76	76	TDS-60	3"	172	36	405
TDM- 80	80	TDS-61	3.1/8"	172	36	405
TDM- 85	85	TDS-63	3.3/8"	180	38	430
TDM- 90	90	TDS-64	3.5/8"	195	40	455
TDM- 95	95	TDS-65	3.3/4"	195	40	455
TDM- 98	98	TDS-66	3.7/8"	206	40	455
TDM- 100	100	TDS-67	4"	210	47	500
TDM- 105	105	TDS-68	4.1/8"	220	47	500
TDM- 110	110	TDS-69	4.1/4"	226	47	500
TDM- 115	115	TDS-70	4.1/2"	238	56	550
TDM- 120	120	TDS-72	4.3/4"	247	56	550
TDM- 125	125	TDS-73	4.7/8"	255	56	550
TDM- 130	130	TDS-74	5"	275	60	575





# HEAVY DUTY SLUGGING / STRIKING WRENCHES

Striking Wrenches are designed to be Struck by a hammer on the anvil area, in order to loosen frozen fasteners or to set and tighten fasteners. Anvils are proportional to wrench opening size. Specially selected alloy steel & the best suited heat treatment provides, maximum durability for long life and to withstand the severe working conditions.

## STRAIGHT RING TYPE

Specially Designed for most rugged industrial application. Straight Handle design resists springing while allowing the fastener to turn easier.



Wrench Size (A/F)						
METRIC SIZE		SAE SIZE		Head Dia.	Head Thk.	Length (Mm)
Part No.	Size	Part No.	Size			
TSM -19	19	TS-25	3/4"	54	18	175
TSM -22	22	TS-28	7/8"	54	18	175
TSM -24	24	TS-29	15/16"	54	18	175
TSM -27	27	TS-31	1.1/16"	54	18	175
TSM -29	29	TS-32	1.1/8"	54	18	175
TSM -30	30	TS-33	1.3/16"	68	22	210
TSM -32	32	TS-34	1.1/4"	68	22	210
TSM -33	33	TS-35	1.5/16"	68	22	210
TSM -35	35	TS-36	1.3/8"	68	22	210
TSM -36	36	TS-37	1.7/16"	68	22	210
TSM -38	38	TS-38	1.1/2"	68	22	210
TSM -41	41	TS-39	1.5/8"	80	28	245
TSM -43	43	TS-40	1.11/16"	80	28	245
TSM -44	44	TS-41	1.3/4"	80	28	245
TSM -46	46	TS-42	1.13/16"	80	28	245
TSM -47	47	TS-43	1.7/8"	80	28	245
TSM -50	50	TS-45	2"	80	28	245
TSM -52	52	TS-46	2.1/16"	102	35	285
TSM -55	55	TS-47	2.3/16"	102	35	285
TSM -57	57	TS-48	2.1/4"	102	35	285
TSM -60	60	TS-50	2.3/8"	102	35	285
TSM -62	62	TS-51	2.7/16"	102	35	285
TSM -63	63	TS-52	2.1/2"	102	35	285
TSM -65	65	TS-53	2.9/16"	102	35	285
TSM -67	67	TS-54	2.5/8"	122	40	322
TSM -70	70	TS-56	2.3/4"	122	40	322
TSM -71	71	TS-57	2.13/16"	122	40	322
TSM -75	75	TS-59	2.15/16"	122	40	322
TSM -76	76	TS-60	3"	122	40	322
TSM -80	80	TS-61	3.1/8"	122	40	322
TSM -85	85	TS-63	3.1/8"	130	40	340
TSM -90	90	TS-64	3.5/8"	136	45	350
TSM -95	95	TS-65	3.3/4"	140	45	375
-	-	TS-66	3.7/8"	158	50	415
TSM -100	100	TS-67	4"	158	50	415
TSM -105	105	TS-68	4.1/8"	164	50	450
TSM -110	110	TS-69	4.1/4"	170	55	450
TSM -115	115	TS-70	4.1/2"	175	55	465
TSM -120	120	TS-72	4.3/4"	190	60	490

Wrench Size (A/F)						
METRIC SIZE		SAE SIZE		Head Dia.	Head Thk.	Length (Mm)
Part No.	Size	Part No.	Size			
TSM -125	125	TS-73	4.7/8"	200	60	510
TSM -130	130	TS-74	5"	210	65	515
TSM -135	135	TS-75	5.3/8"	222	65	540
TSM -140	140	TS-76	5.1/2"	230	70	550
TSM -145	145	TS-78	5.3/4"	230	70	565
TSM -150	150	TS-80	6"	230	70	565
TSM -155	155	TS-81	6.1/8"	230	70	565
TSM -160	160	TS-82	6.1/4"	270	70	635
TSM -165	165	TS-84	6.1/2"	270	70	635
TSM -170	170	TS-86	6.3/4"	270	70	635
TSM -175	175	TS-87	6.7/8"	270	70	635
TSM -180	180	TS-89	7.1/8"	270	70	635
TSM -185	185	TS-90	7.1/4"	295	75	680
TSM -190	190	TS-92	7.1/2"	295	75	680
TSM -195	195	TS-93	7.5/8"	295	75	680
TSM -200	200	TS-95	7.7/8"	295	75	680
TSM -205	205	TS-97	8.1/8"	295	75	680
TSM -210	210	TS-98	8.1/4"	325	80	725
TSM -215	215	TS-100	8.1/2"	325	80	725
TSM -220	220	TS-101	8.5/8"	325	80	725
TSM -225	225	TS-103	8.7/8"	325	80	725
TSM -230	230	TS-105	9.1/8"	325	80	725

## SQUARE DRIVE TYPE



Model No.	Sq. Drive	D mm	L mm
TSW-75	3/4"	62	210
TSW-100	1"	76	290
TSW-150	1.1/2"	116	380






# HEAVY DUTY STRUCTURAL WRENCHES

## STRAIGHT & OFFSET HANDLE RING TYPE

Wrench Size (A/F)						
METRIC SIZE		SAE SIZE		Head Dia.	Head Thk.	Length (mm)
Part No.	Size	Part No.	Size			
SSM-27	27	SS-31	1.1/16"	42	18	400
SSM-28	28	SS-32	1.1/8"	42	21	415
SSM-30	30	SS-33	1.3/16"	45	22	415
SSM-32	32	SS-34	1.1/4"	49	22	435
SSM-34	34	SS-35	1.5/16"	49	24	485
SSM-36	36	SS-37	1.7/16"	58	24	485
SSM-38	38	SS-38	1.1/2"	58	26	515
SSM-41	41	SS-39	1.5/8"	62	29	540
SSM-43	43	SS-40	1.11/16"	62	29	565
SSM-46	46	SS-42	1.13/16"	69	32	590
SSM-48	48	SS-43	1.7/8"	69	32	590
SSM-50	50	SS-45	2"	76	34	625
SSM-52	52	SS-46	2.1/16"	76	37	660
SSM-55	55	SS-47	2.3/16"	82	37	660
SSM-57	57	SS-48	2.1/4"	82	38	680
SSM-60	60	SS-50	2.3/8"	90	38	680
SSM-62	62	SS-51	2.7/16"	90	38	740
SSM-65	65	SS-54	2.9/16"	98	38	740
SSM-70	70	SS-56	2.3/4"	106	40	800
SSM-75	75	SS-59	2.15/16"	114	40	800

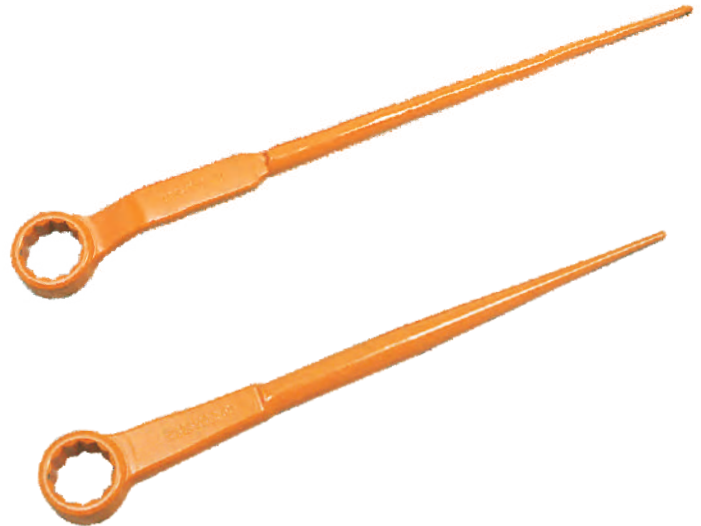

**NOTE:** FOR PART NO OF OFFSET HANDLE ADD 'O' AFTER FIRST 'S'

## STRAIGHT & OFFSET HANDLE OPEN JAW TYPE

Wrench Size (A/F)						
METRIC SIZE		SAE SIZE		Head Dia.	Head Thk.	Length (mm)
Part No.	Size	Part No.	Size			
SDOM-16	16	SDO-23	5/8"	35	12	305
SDOM-17	17	SDO-24	11/16"	38	12	305
SDOM-19	19	SDO-25	3/4"	42	12	305
SDOM-22	22	SDO-27	13/16"	56	16	445
SDOM-23	23	SDO-28	7/8"	56	16	445
SDOM-24	24	SDO-29	15/16"	56	16	445
SDOM-26	26	SDO-30	1"	56	16	445
SDOM-27	27	SDO-31	1.1/16"	56	16	445
SDOM-28	28	SDO-32	1.1/8"	56	16	445
SDOM-30	30	SDO-33	1.3/16"	56	16	445
SDOM-32	32	SDO-34	1.1/4"	84	24	648
SDOM-36	36	SDO-37	1.7/16"	84	24	648
SDOM-38	38	SDO-38	1.1/2"	84	24	648
SDOM-41	41	SDO-39	1.5/8"	112	24	775
SDOM-43	43	SDO-40	1.11/16"	112	24	775
SDOM-46	46	SDO-42	1.13/16"	112	24	775
SDOM-48	48	SDO-43	1.7/8"	112	24	775
SDOM-50	50	SDO-44	1.15/16"	112	27	775
SDOM-55	55	SDO-45	2"	160	30	850
SDOM-60	60	SDO-48	2.3/8"	160	30	850



**NOTE:** FOR PART NO OF STRAIGHT HANDLE REMOVE 'O'

